

# PROFORMANCE<sup>®</sup>

## HIGH INTENSITY AIR DISINFECTION SYSTEMS

The PROfessional's Choice For Extreme Microbial Control



# PRO401H-12-P

MULTIVOLTAGE UV GERMICIDAL AIR PURIFIER

High output UVC germicidal lamp controls bacteria, viruses, and mold spores (pathogens).

## Highlights

- Powerful output, up to three times more microwatts than normal single-tube lamps.
- LED lamp monitor lets you know at a glance the system is operating.
- Units fit in tight spaces.
- 12" lamp for compact fit.
- 140 Microwatts (single 12" lamp).
- Lifetime warranty on electronics
- 2-year warranty on lamp.
- ETL certified



## Available Accessories

- Ductboard mounting plate w/ additional reflective shield available.



## REMOTE POWER SUPPLY SPECIFICATIONS

### PRO401H-12-P

Power supply dimensions: Size (L x W x D) 8.75h x 4.25w x 2.75 d  
 Auto-sensing multivoltage ballast 120 - 240 VAC 50/60 HZ.  
 50 WATT .40/.20 AMP  
 12" Germicidal U lamps penetrates duct 12.25"

## GERMICIDAL LAMP SPECIFICATIONS

12" Twin-Tube Germicidal U Lamp	24 watts, 425 mA 140 μW/cm <sup>2</sup>
Rated Life	2 years
Lamp Dimensions	13" from base to end
Glass Diameter	30 mm (15 mm x 2)



For Critical Applications Use Porex™ Virtek™ Reflective Media For Optimal Performance

[www.PROformanceIAQ.com](http://www.PROformanceIAQ.com)



# PROFORMANCE<sup>®</sup>

## HIGH INTENSITY AIR DISINFECTION SYSTEMS

The PROfessional's Choice For Extreme Microbial Control

LIFETIME WARRANTY



# PRO402H-12-P


MULTIVOLTAGE UV GERMICIDAL AIR PURIFIER WITH ODOR CONTROL

## Highlights

- Powerful outputs up to six times more intensity than a standard single-tube lamp.
- Fits in tight spaces.
- LED lamp monitor lets you know at a glance the UV lamp is operating.
- Auto-sensing ballast works from 120 VAC to 240 VAC.
- 12" lamps for compact fit.
- 280 Microwatts (dual 12" lamps).
- Lifetime warranty on electronics
- 2-year warranty on lamps.
- ETL certified
- Easy Duct Mount Installation

## Available Accessories

- Ductboard mounting plate w/ additional reflective shield available.

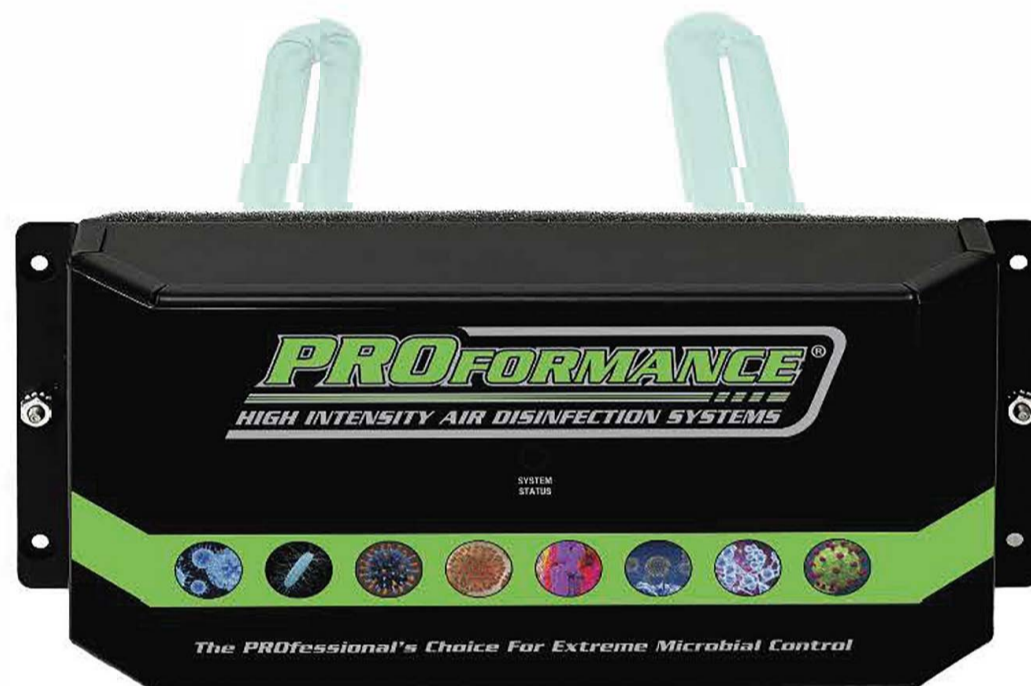

## REMOTE POWER SUPPLY SPECIFICATIONS

Power supply dimensions: Size (L x W x D) 11.45 h x 5.53 w x 2.125 d  
Auto-sensing multivoltage ballast 120 - 240 VAC 50/60 HZ.

100 WATT .40/.20 AMP

12" Germicidal H lamps penetrates duct 12.25"

## LAMP SPECIFICATIONS

12" Twin-Tube Germicidal H Lamp 24 watts, 425 mA 140  $\mu$ W/cm<sup>2</sup>

Rated life 2 years

Lamp dimensions 13" from base to end

Glass diameter 30 mm (15 mm x 2)



For Critical Applications Use Porex™ Virtek™ Reflective Media For Optimal Performance



[www.PROformancelAQ.com](http://www.PROformancelAQ.com)